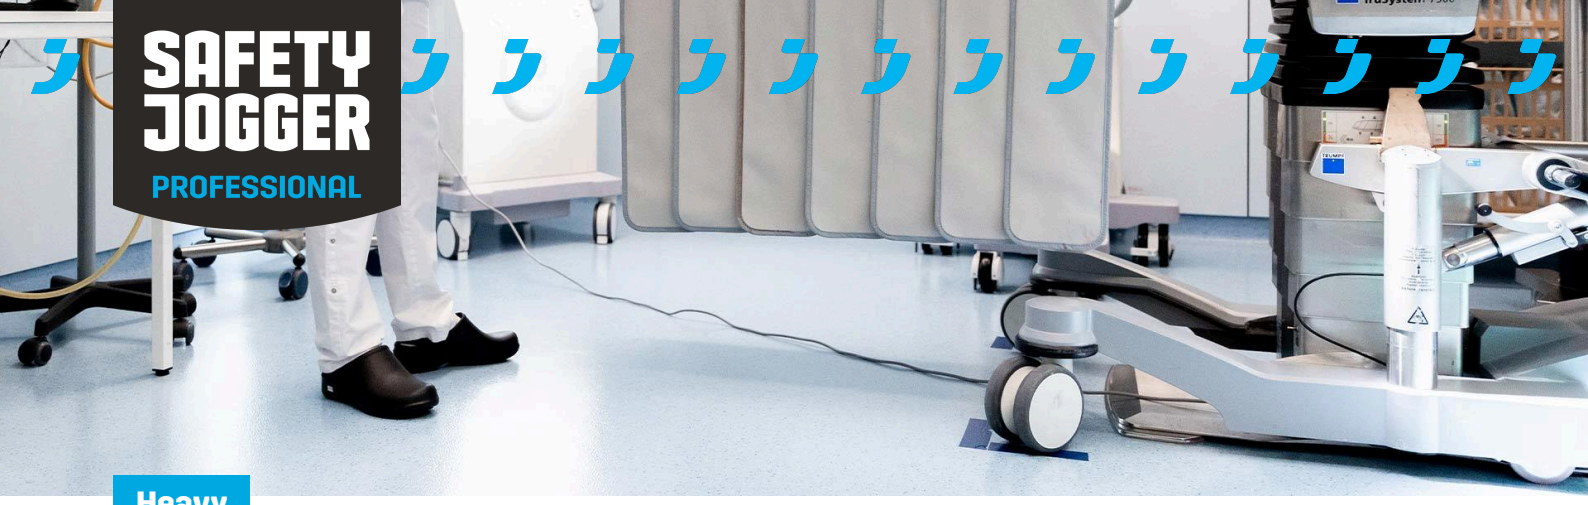


Heavy

BESTLIGHT1 OB

Medical Clogs Non-Slip

Designed for hygiene and comfort, Safety Jogger BESTLIGHT1 clogs are lightweight, washable, and slip-resistant. Perfect for medical and food industries.

Upper	Expanded EVA
Lining	N/A
Footbed	SJ Basic 2
Outsole	EVA / Rubber (NBR)
Category	OB / SR, HRO
Size range	EU 35-47 / UK 3.0-12.0 / US 3.0-13.0 JPN 21.5-31 / KOR 230-310
Sample weight	0.197 kg
Norms	EN ISO 20347:2022+A1:2024 ASTM F3445:2024

CO_2 3.31 kg




BLK



WHT



Washable 30°C
These shoes can be washed in a washing machine at 30°C.



Chemically & UV sterilizeable
This shoe is chemically and UV sterilizeable.

Industries:
Catering, Chemical, Cleaning, Food & beverages, Medical

Environments:
Dry environment, Extreme slippery surfaces, Wet environment

Maintenance instructions:
To extend the life of your shoes, we recommend to clean them regularly and to protect them with adequate products. Do not dry your shoes on a radiator, nor nearby a heat source.

Test results:

	Description	EN ISO 20347	Result	Measure unit
Upper	**Expanded EVA**			
	Upper: permeability to water vapor	≥ 0.8	N/A	mg/cm^2/h
	Upper: water vapor coefficient	≥ 15	N/A	mg/cm^2
Lining	**N/A**			
	Lining: permeability to water vapor	≥ 2	N/A	mg/cm^2/h
	Lining: water vapor coefficient	≥ 20	N/A	mg/cm^2
Footbed	**SJ Basic 2**			
	Footbed: abrasion resistance (dry/wet) (cycles)	25600/12800	25600/12800	cycles
Outsole	**EVA / Rubber (NBR)**			
	Outsole abrasion resistance (volume loss)	≤ 150	140	mm^3
	Basic Slip resistance - Ceramic + NaLS - Forward heel slip	≥ 0.31	0.38	friction
	Basic Slip resistance - Ceramic + NaLS - Backward forepart slip	≥ 0.36	0.39	friction
	SR Slip resistance - Ceramic + glycerin - Forward heel slip	≥ 0.19	0.3	friction
	SR Slip resistance - Ceramic + glycerin - Backward forepart slip	≥ 0.22	0.3	friction
	Antistatic value	0.1 - 1000	N/A	MegaOhm
	ESD value	0.1 - 100	N/A	MegaOhm
	Heel energy absorption	≥ 20	N/A	J

Sample size: 42

Our shoes are constantly evolving, the technical data above may change. All product names and brand Safety Jogger, are registered and may not be used or reproduced in any format, without written consent from us.

Carbon footprint:

	Description	Result	Measure unit
CO2 emission			
	Material	1.06	kg
	Packing	0.10	kg
	Manufacturing	1.90	kg
	Transport	0.26	kg
		3.31 kg CO2/pair	

	Description	Result
Recycled content		
	Product	0%
	Packing	99%

CO2 calculation:
Values are rounded to two decimals.
These analyses are performed using our in-house environmental calculators, developed within the Cortina Group. The CO2 values are valid at the time of calculation and may be subject to change.